

CR Inspection Trolleys

Aluminum alloy inspection trolleys allow two persons, in a standing position, to inspect two, three and four bundled conductor lines. The trolleys are equipped with spacers and insulators on top, along with stationary brakes and a meter counter.

Special models are available upon request

21006030



21006040



21006055



21006030-18

Inspection trolleys for two bundled conductors lines, motorized version

Mass 243 lbs (110 kg)

ENGINE

Gasoline 4 hp (3 kW)
 Cooling system air
 Starting system by handle

21006035-18

Inspection trolleys for two bundled conductors lines

Spacing 18 inches (457 mm)
 Capacity 562 lbf (2.5 kN)
 Mass 176 lbs (80 kg)

21006040-18

Inspection trolleys for two or three bundled conductors lines, motorized version

Mass 265 lbs (120 kg)

ENGINE

Gasoline 4 hp (3 kW)
 Cooling system air
 Starting system by handle

21006045-18

Inspection trolleys for three bundled conductors lines

Spacing 18 inches (457 mm)
 Capacity 562 lbf (2.5 kN)
 Mass 198 lbs (90 kg)

21006050-18

Inspection trolleys for four bundled conductors lines, motorized version

Mass 276 lbs (125 kg)

ENGINE


Gasoline 4 hp (3 kW)
 Cooling system air
 Starting system by handle

21006055-18


Inspection trolleys for four bundled conductors lines

Spacing 18 inches (457 mm)
 Capacity 562 lbf (2.5 kN)
 Mass 209 lbs (95 kg)

21006030-18

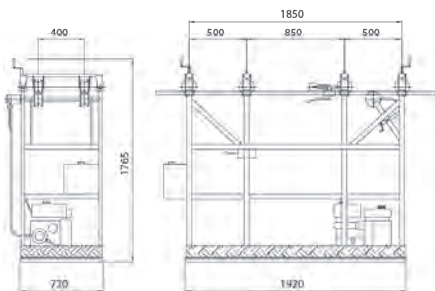

21006040-18

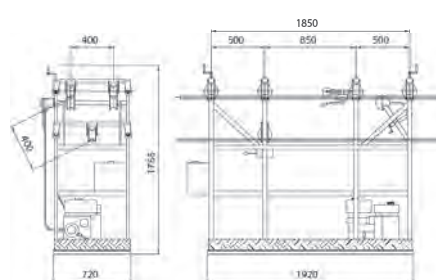

21006055-18

