

PT1252 HYDRAULIC PULLER-TENSIONER

Leading the Industry in Design & Performance

The Condux Tesmec line of Puller-Tensioners is designed to improve productivity and efficiency while limiting downtime and improving job site safety. Hydraulic Puller-Tensioners offer industry leading features like negative self-acting hydraulic brakes, integrated hydraulic dynamometers, hydraulic cooling systems, advanced user controls and more. Condux Tesmec puller-tensioners are the safest and most effective on the market today.



www.conduxtesmec.com

ISO 9001:2015
CERTIFIED

PT1252 HYDRAULIC PULLER-TENSIONER



LOCKABLE SOUNDPROOF COVERS

Lockable, soundproof covers add safety and security during and after machine operations.




NEW DIGITAL HMI

The new user interface features a 7-inch color display with integrated pull and speed recorder.



REMOTE CONTROL

The radio remote control provides total user machine control while integrating with the new digital user interface.

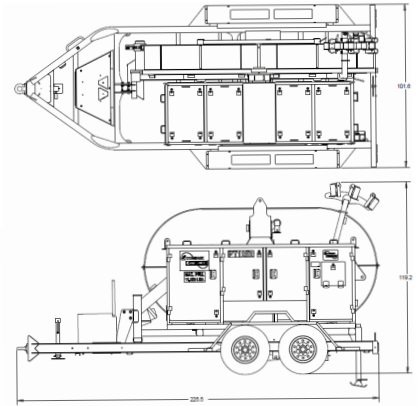

GENERAL SPECIFICATIONS:

PERFORMANCE

Max pull/tension	11,240 lbf (50 kN)
Speed at max pull/tension	.9 mph (1,5 km/h)
Max speed	3.1 mph (5 km/h)
Pull/tension at max speed	3,597 lbf (16 kN)

CHARACTERISTICS

Bull-wheel diameter	71 in (1,800 mm)
Max conductor/rope diameter	2 in (51 mm)
Number of grooves	5

Additional sectors available for VRA/T2 conductor.

ENGINE

Diesel	74 hp (55,4 kW)
Emission Level	tier 4f/Stage IIIB
Cooling system	liquid
Electrical system	12 V

HYDRAULIC TRANSMISSION

Closed hydraulic with a pull presetting system that automatically adjusts pulling speed.

GENERAL SPECIFICATIONS - DOT

Weight (w/rope)	10,900 lbs (4,945 kg)
Overall Length	225 in (5,715 mm)
Overall Width	101 in (2,565 mm)
Height	119 in (3,022 mm)

STANDARD EQUIPMENT

New digital HMI provided with:

- Color 7-in. display.
- Integrated pull and speed recorder.

Radio remote control.

Remote Diagnostic with GPS Data Recorder.

Negative self-acting hydraulic brake.

Automatic hydraulic oil cooling system.

Hydraulic quick connectors to control a separate reel stand/winder.

Electronic arrangement for connection of multiple machines and for stringing synchronization.

Gearbox with 3 operating positions:

- Neutral position (with free bull-wheels for conductor loading and unloading)
- low tension position 450 - 2,700 lbs (2 - 12 kN)
- nominal tension position 1,800 - 11,240 lbs (8 - 50 kN)

Hydraulic front stabilizer.

Grounding connection point.

Hydraulic rope clamp for reel change operations.

Automatic greaser.

OPTIONAL EQUIPMENT

- ALL037** Preheating device for use up to -22°F (-30°C)
- ALL261** External printer
- TAYS324** 6 groove sector kit

CONDUX | TESMEC



Note: the basic machine performance is calculated at 68°F (20°C) and at sea level.

The latest issue of the Condux Tesmec Stringing Equipment & Accessories Catalog includes comprehensive product information specific for stringing applications in the transmission and distribution industries.



145 Kingswood Drive • Suite 1 • PO Box 668
Mankato, MN 56002-0668 U.S.A.
1-888-980-1209 Toll Free Phone (U.S. & Canada)
1-507-387-8069 Phone
info@conduxtesmec.com • www.conduxtesmec.com