

RS26/RS30

HYDRAULIC REEL STANDS


Advanced Design Features & Superior Pulling Performance

The Condux Tesmec RS26 & RS30 Hydraulic Reel Stands are designed to work exclusively with Condux Tesmec Puller-Tensioners and Tensioners. Manufactured of high grade steel tubing for maximum strength and durability. They come standard with a hydraulic negative brake that provides maximum personnel and conductor safety. The unique design allows for easy loading and unloading.



ISO 9001:2015
CERTIFIED

RS26/RS30 HYDRAULIC REEL STANDS

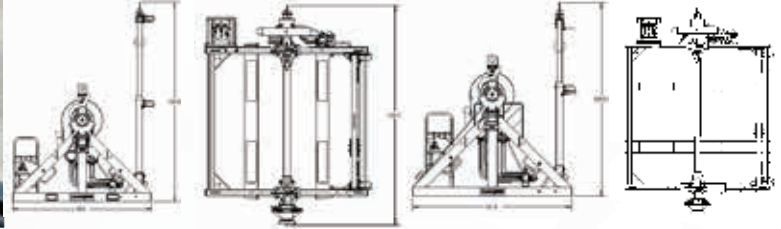

H-FRAME

The H-Frame option gives you the ability to set multiple reel stands in line for quick change over when using multiple conductor reels.

QUICK RELEASE

Arbor bar bearings are positioned in a saddle with a single pin release for quick change over time.

GENERAL SPECIFICATIONS:

RS26 REEL STAND

RS26	21034200
------	----------

RS26 REEL CAPACITY

Maximum Capacity	26,000 lbs (11,793 kg)
Maximum Capacity	102 x 70 in (2,591 x 1,778 mm)

RS26 REEL STAND SPECIFICATIONS

Overall Height	81 in (2,057 mm)
Overall Length	96 in (2,438 mm)
Overall Width	115 in (2,997 mm)
Overall Weight	2,600 lbs (1,179 kg)

RS26 STANDARD FEATURES

- Hydraulic Negative Brake
- 50 feet (15.24 m) of Hydraulic Hose
- 4 in (102 mm) Arbor Bar

RS26 OPTIONAL FEATURES

RS26 H-Frame Kit	21034000
RS26 3 in (76mm) Arbor Bar Kit	*21034260
*RS26 3 in Sleeve Kit	21034267
RS26 Manual Disc Brake Kit	**21035645
RS26 Brake Mount Kit	21035647
Drive Pin Offset Kit	21034258

* Requires a sleeve kit
** Requires a mounting kit

RS30 REEL STAND MODELS

RS30	21035600
------	----------

RS30 REEL CAPACITY

Maximum Capacity	30,000 lbs (13,608 kg)
Maximum Capacity	120 x 85 in (3,048 x 2,159 mm)

RS30 REEL STAND SPECIFICATIONS

Overall Height	91 in (2,311 mm)
Overall Length	102 in (2,591 mm)
Overall Width	130 in (3,302 mm)
Overall Weight	3,050 lbs (1,384 kg)

RS30 STANDARD FEATURES

- Hydraulic Negative Brake
- 50 feet (15.24 m) of Hydraulic Hose
- 4 in (102 mm) Arbor Bar

RS30 OPTIONAL FEATURES

RS30 H-Frame Kit	21035984
RS30 Manual Disc Brake Kit	**21035645
RS30 Brake Mount Kit	21035646
Drive Pin Offset Kit	21034258

** Requires a mounting kit

CONDUX | TESMEC



Note: the basic machine performance is calculated at 68°F (20°C) and at sea level.

The latest issue of the Condux Tesmec Stringing Equipment & Accessories Catalog includes comprehensive product information specific for stringing applications in the transmission and distribution industries.



145 Kingswood Drive • Suite 1 • PO Box 668
Mankato, MN 56002-0668 U.S.A.
1-888-980-1209 Toll Free Phone (U.S. & Canada)
1-507-387-8069 Phone
info@conduxtesmec.com • www.conduxtesmec.com