

## RS26/RS30 HYDRAULIC REEL STANDS


### *Advanced Design Features & Superior Pulling Performance*

The Condux Tesmec RS26 & RS30 Hydraulic Reel Stands are designed to work exclusively with Condux Tesmec Puller-Tensioners and Tensioners. Manufactured of high grade steel tubing for maximum strength and durability. They come standard with a hydraulic negative brake that provides maximum personnel and conductor safety. The unique design allows for easy loading and unloading.



**ISO 9001:2015**  
**CERTIFIED**

# RS26/RS30 HYDRAULIC REEL STANDS

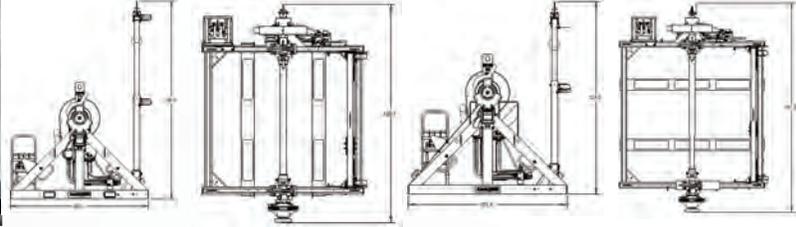

## H-FRAME

The H-Frame option gives you the ability to set multiple reel stands in line for quick change over when using multiple conductor reels.

## QUICK RELEASE

Arbor bar bearings are positioned in a saddle with a single pin release for quick change over time.

## GENERAL SPECIFICATIONS:

### RS26 REEL STAND

RS26	21034200
------	----------

### RS26 REEL CAPACITY

Maximum Capacity	26,000 lbs (11,793 kg)
Maximum Capacity	102 x 70 in (2,591 x 1,778 mm)

### RS26 REEL STAND SPECIFICATIONS

Overall Height	81 in (2,057 mm)
Overall Length	96 in (2,438 mm)
Overall Width	115 in (2,997 mm)
Overall Weight	2,600 lbs (1,179 kg)

### RS26 STANDARD FEATURES

- Hydraulic Negative Brake
- 50 feet (15.24 m) of Hydraulic Hose
- 4 in (102 mm) Arbor Bar

### RS26 OPTIONAL FEATURES

RS26 H-Frame Kit	21034000
RS26 3 in (76mm) Arbor Bar Kit	*21034260
*RS26 3 in Sleeve Kit	21034267
RS26 Manual Disc Brake Kit	**21035645
RS26 Brake Mount Kit	21035647
Drive Pin Offset Kit	21034258

\* Requires a sleeve kit  
\*\* Requires a mounting kit

### RS30 REEL STAND MODELS

RS30	21035600
------	----------

### RS30 REEL CAPACITY

Maximum Capacity	30,000 lbs (13,608 kg)
Maximum Capacity	120 x 85 in (3,048 x 2,159 mm)

### RS30 REEL STAND SPECIFICATIONS

Overall Height	91 in (2,311 mm)
Overall Length	102 in (2,591 mm)
Overall Width	130 in (3,302 mm)
Overall Weight	3,050 lbs (1,384 kg)

### RS30 STANDARD FEATURES

- Hydraulic Negative Brake
- 50 feet (15.24 m) of Hydraulic Hose
- 4 in (102 mm) Arbor Bar

### RS30 OPTIONAL FEATURES

RS30 H-Frame Kit	21035684
RS30 Manual Disc Brake Kit	**21035645
RS30 Brake Mount Kit	21035646
Drive Pin Offset Kit	21034258


\*\* Requires a mounting kit

**CONDUX | TESMEC**



Note: the basic machine performance is calculated at 68°F (20°C) and at sea level.

The latest issue of the Condux Tesmec Stringing Equipment & Accessories Catalog includes comprehensive product information specific for stringing applications in the transmission and distribution industries.



500 N. Industrial Road  
Mankato, MN 56001, USA

1-888-980-1209 Toll Free Phone (U.S. & Canada)

1-507-387-8069 Phone

info@conduxtesmec.com • www.conduxtesmec.com